

CAN1 ← or → CAN1

CAN2

LEFT BLINKER
blue connector 16PIN
yellow/purple pin14

RIGHT BLINKER
blue connector 16PIN
blue/green pin13

+12V red pin9
blue connector 16PIN

white connector 24PIN
grey/orange pin24 CANH

purple/orange pin23 CANL
white connector 24PIN



diagnostic connector
grey/orange pin3 CANH

purple-orange pin11 CANL
diagnostic connector

diagnostic connector
white/blue pin6 CANH

white pin14 CANL
diagnostic connector

brown/white pin
central locking switch
(Alternative central locking)

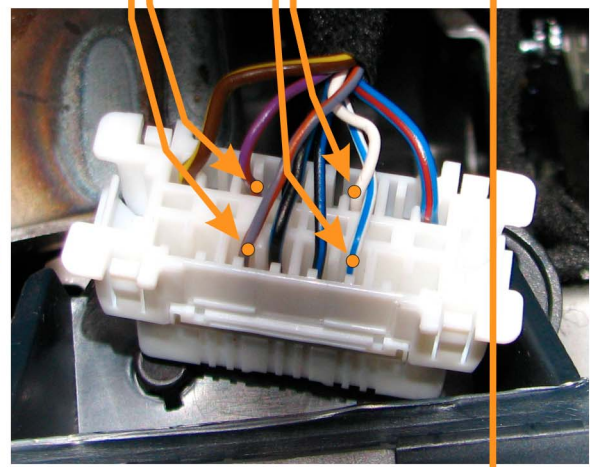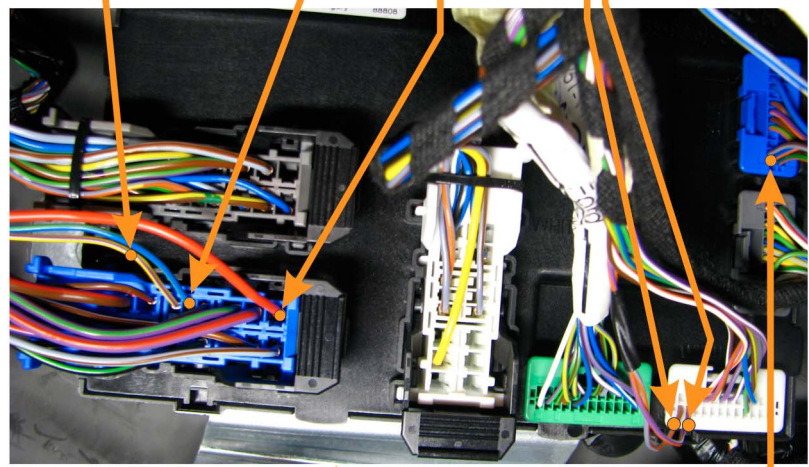

Information for car owner:
before using the pilot "trunk open"
switch you need to disarm the alarm

HOOD SENSOR
blue connector 24PIN
blue/orange pin12

Closing car form door lock arm's the alarm.
Opening car from door lock don't disarm the alarm.

